


# neoson

The craftsman of emotions...

... presents *Genèse*

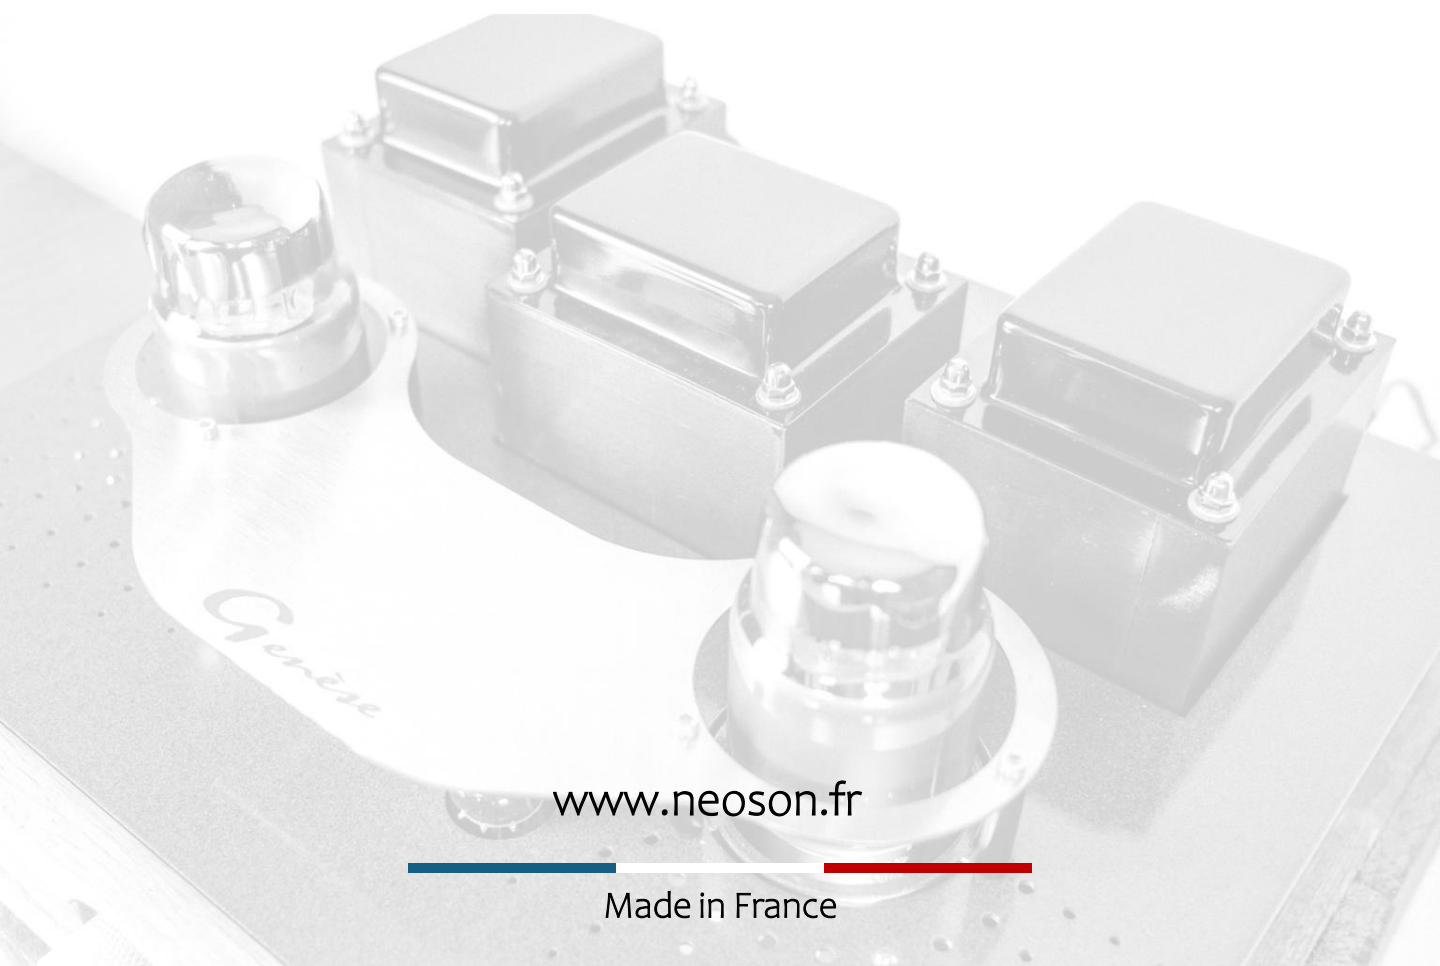

[www.neoson.fr](http://www.neoson.fr)

Made in France

## Our philosophy, our promises

Convinced that power does not guarantee musical expressiveness, we amplify the source signal with two high-quality tubes, a design capable of reproducing the sound fidelity of the recording and provoking authentic emotions.

Our ambition is to offer you a sleek and efficient integrated amplifier, designed with extreme precision and a meticulous selection of mechanical and electronic components. With the user in mind, its design is robust, safe, and refined.

You'll rediscover your songs and albums with a unique sound signature, awakening the emotion of each note and bringing you closer to your favorite artists.

## Genèse

Made in France

An ultra-linear, single-ended tube integrated amplifier with a pure Class A design. Its musical qualities surpass its power, transporting you to a stage world rich in sound and spatiality. Its design facilitates modularity, and Genesis offers the ability to evolve to better match your auditory and emotional sensitivity.

### Features

- Preamp stage: 2x 12AX7 tubes.
- Power stage: 2x KT88 tubes.
- Steatite tube mounts.
- Analog inputs: 3 line inputs.
- Load impedance: 4/8  $\Omega$ .
- 1.5-minute power-up (tube heating delay).
- Microcontroller controls power-up, power-down, and analog inputs.
- Oversized, hand-wound audio output transformers.
- ALPS potentiometer (optional motorized with IR remote control)
- High-quality silver/gold bonding capacitors.
- High-quality audio resistors.
- High-quality electrical wiring made of 99.9998% purity UP-OCC copper and PTFE insulation.
- Multi-shielded audio line wiring with 100% coverage and helical winding of copper + AL/PT foil.
- The power supply consists of an oversized transformer specially designed for Genèse.
- Rigid chassis design with an epoxy paint finish.
- Removable metal mesh cages to protect the KT88 tubes.
- Brushed stainless steel sheet to protect the 12AX7 tubes.
- Solid oak front panel.
- Dimensions (W x H x D): 360 x 160 x 360mm.
- Net weight: 15.3 kg.
- Power requirements: 230V at  $\pm 5\%$  (50Hz).
- Power consumption: 100W.

### Performance

- Output power: 10W + 10W RMS.
- Frequency response ( $\pm 1$  dB): 20Hz-20KHz.
- Input sensitivity: 0.8Vrms.
- THD: <1% from 20 to 20kHz at 1W.

[www.neoson.fr](http://www.neoson.fr)